

FISH PUMPS SAFE AND EFFICIENT TRANSFER


VAKI® Fish Pumps protect your investment during handling operations with a safe, gentle, and fast way of transfering fish. Our **Fish Pumps**, manufactured from the highest-quality materials, are capable of reducing operating costs and significantly improving efficiency.

The **Fish Pump** is available in three sizes: 6", 8", 10" and two model types: Basic and Smart.



HIGH CAPACITY, EFFICIENT, AND EASY TO MOVE

For many years, fish farmers around the world have utilized the robust, proven performance of our **Fish Pumps** to move salmon, trout, char, tilapia, hybrid striped bass, mackerel, anchovy, yellow-tail, shrimp, and many other species.

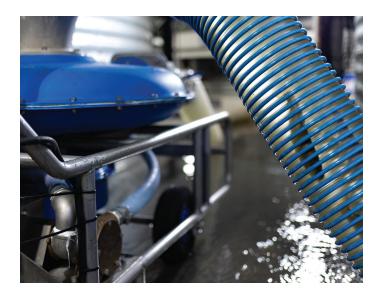

FEATURES

- Cart-mounted pump includes a stainless steel cart with large pneumatic tires
- Self priming via a rugged industrial priming pump
- Supplied with camlock fittings for easy change between dufferent pipe sizes
- Wireless remote control

BENEFITS

- Fully compatible with VAKI® SmartFlow
- Gentle on fish
- High capacity
- Easy to set-up and move around site
- Reduces labor costs and eliminates the need to lift heavy nets and buckets
- Touch screen control



6" FISH PUMP

Weight: 190kg

Dimensions (LxWxH): $170 \times 81 \times 119 \text{cm}$

Inlet Size: 150mm (6") reduce to 100mm (4") or 50mm (2") **Outlet Size:** 150mm (6") reduce to 100mm (4") or 50mm (2")

Max. Pump Output:2400 lpm/635gpmPump Speed:200-670rpm

Max. Pump Head (TDH):9mMax. Pump Suction:3mMax. Horizontal Transfer:2.000m

Power Options: 6Kw, 50 or 60Hz, 3 Phase



8" FISH PUMP

Weight: 730kg

 Dimensions (LxWxH):
 203 x 132 x 152cm

 Inlet Size:
 203mm (8")

 Outlet Size:
 203mm (8")

 Max. Pump Output:
 7500 lpm/635gpm

 Pump Speed:
 200-500rpm

Max. Pump Head (TDH):13mMax. Pump Suction:3mMax. Horizontal Transfer:2.000m

Power Options: 16.5Kw, 50 or 60Hz, 3 Phase



10" FISH PUMP

Weight: 1000kg

Dimensions (LxWxH): 2020 x 1300 x 1500cm

Inlet Size: 10"
Outlet Size: 10"

Max. Pump Output: 14000 lpm/3700gpm (at 14ft/3.4m head)

Pump Speed: 200-350rpm

Max. Pump Head (TDH):11mMax. Pump Suction:3mMax. Horizontal Transfer:2.000m

Power Options: 25Kw, 50 or 60Hz, 3 Phase







